System Overview:


The MP3KITA consists of 2 speakers, a 50 Watt amp with volume control and an IC3.5 Connector kit.

Installation considerations:

- Read and follow the installation instructions provided with each system component.
- Disconnect Battery power before installing this system.
- Be sure there is clearance before cutting or drilling any holes.
- Connect Blue wire from Amp to ignition switch, panel switch or other switched 12 volt source.

Playing:

- With the Amp on and connected to the Headphone jack of the MP3Player, Switch on the Player and set the
 volume of the player to max volume. The control of the amp volume is handled by the Waterproof Volume
 control knob supplied with the Amp
- Use the Player controls to select Playlists or individual track.

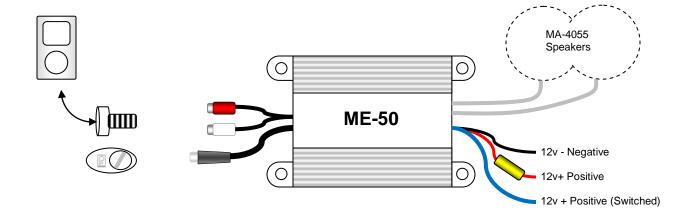







ME-50 Amp Settings

The ME-50 Amp is set at the factory at 70% of Max Volume. In order to get Maximum Volume, adjust the Gain control fully clockwise or to the desired level.

If the supplied Volume knob is used the MP3 player must be set to full volume.

The Input Level should be set to "Line Level"